




## RM-6 OEM Interface

The RM-6 can be used to control multiple machines from a single Sony P2 Command Interface. It is possible to convert a single remote control to a multiple remote control by adding a few extra commands.

CB Electronics have implemented a set of extra commands to help implement multi-machine control as follows:-

- a) Track Arming: A..D, selects which machine track arming is directed to.
- b) Machine Select: A.. D, Gen, Rdr, selects which machine the transport commands are set to.
- c) Record Enable: Enable/Disable Record on selected machine.
- d) Master: Select selected machine (A..D, Gen, Rdr) as master
- e) Chase: Enable Chase on selected machine (A..D)
- f) Set offset on selected machine (A..D, Gen, Rdr)

To demonstrate the use of these commands we have added them as a window on the USB Test a program available from our web site for testing the Dual USB to RS422 interface.

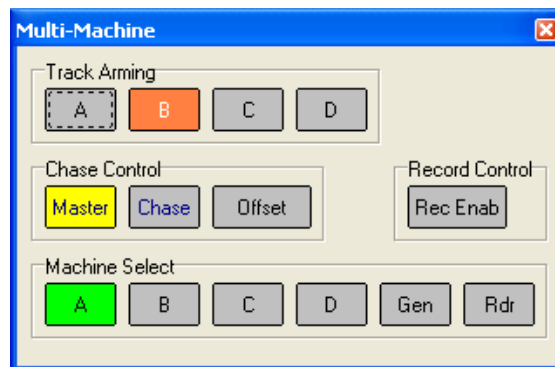

These functions are also available on CBServer Software so that a full working interface can be implemented with none of these extra commands or a subset of them.

### CB Electronics

Loddonside, Lands End House, Beggars Hill Road, Charvil, Berkshire, RG10 0UD, UK  
Tel +44 (0) 1189 320345 Fax +44 (0) 1189 320346  
<http://www.colinbroad.com> E-mail [Support@colinbroad.com](mailto:Support@colinbroad.com)