




Connecting the AX24 using USB-422

RS-422 communication between the AX24 and Mac, Windows or Linux can be established using the CB Electronics Twin Serial Adapter: USB-422.

USB-422 Product Page: <http://www.colinbroad.com/cbsoft/usb422/usb422.html>

The CB USB Twin Serial Adapter has two female 9 pin 'D' ports. Port A is configured as a Sony 9 pin Device(Input) and Port B as a Sony 9 pin controller(Output). By changing internal Links Port A may also be configured as a Sony 9 pin Controller(Output). We recommend configuring Port A as an Output so that both can be connected to an AX24 AD/DA converter using the pinout below.

Connections				
USB-422 Port B (Output)	9 pin 'D' Male on Cable	Colour	9 Pin 'D' Male on Cable	AX-24
	1			
Rx-	2		4	Tx-
Tx+	3		2	Rx+
Ground	4		5	Ground
	5			
	6			
Rx+	7		3	Tx+
Tx-	8		1	Rx-
	9			

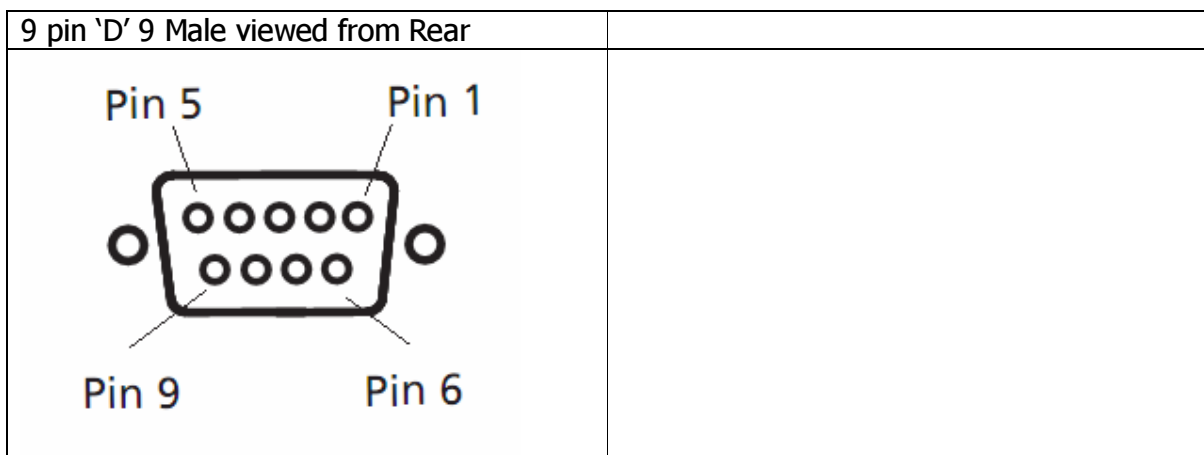

CB Electronics

Loddonside, Lands End House, Beggars Hill Road, Charvil, Berkshire, RG10 0UD, UK
Tel +44 (0) 1189 320345 Fax +44 (0) 1189 320346
<http://www.colinbroad.com> E-mail Support@colinbroad.com